


DynaMetric

TELEPHONE ACCESSORIES

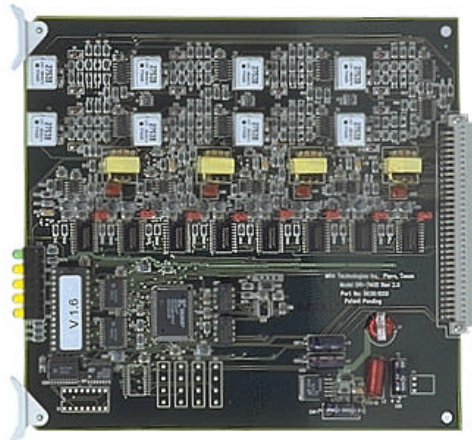

TDP-7400 DIGITAL TO ANALOG CONVERTER

Digital to Analog Conversion

The **DynaMetric** TDP-7400 sets the new standard for quality and convenience in telephone recording. The TDP-7400 lets you make clear, high quality recordings of telephone conversations from 4-wire digital phones on Lucent/AT&T* System 75 or Definity Telephone Systems.

Convenience

The TDP-7400 installs in the phone room and is completely transparent to the user. DTMF is recorded on all out-bound calls for enhanced search capability.

Security

Because the new high-density chassis is mounted in the switch room, the TDP-7400 is secure, like your PBX System. Users or ACD agents can not disconnect or disable recording.


Compatibility

The output of the TDP-7400 is analog voice signal, and is therefore compatible with all recording and voice logging systems. If beep tone is required, an optional Telephone Beep Generator (TBR-10) is available. This very small unit is phone powered and connects in series with the handset cord at the base of the phone.

High Density

Each board contains four duplicate circuits, allowing recording of four simultaneous conversations. Each circuit has a transparent high impedance interface, which allows normal telephone use without loading down the line. The TDP-7400 is available in either a small, single card enclosure, dual card enclosure (shown on next page), or a 19 inch rack mount configuration for larger installations.

Configuration:

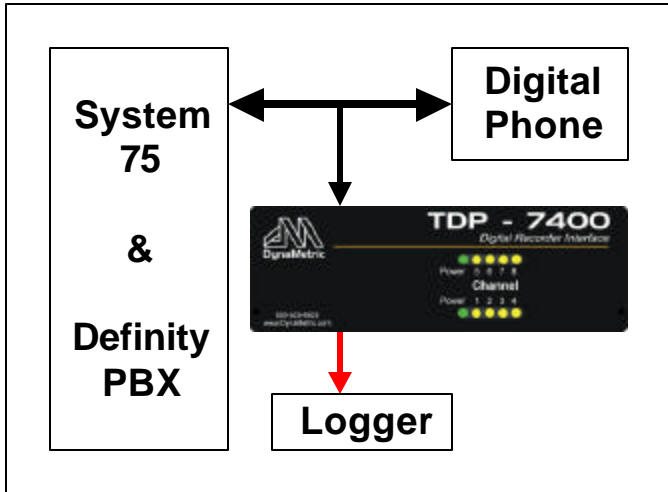

19" Card Cage: 19" x 8.75" x 12". Holds up to 18 boards (72 ports). Side panels can be reversed for wall mounting.

Unit Enclosure: 9.5" x 7.25" x 5.2"
Holds 1 or 2 boards (4 or 8 ports)

Applications

Archival Recording for:

- Monitoring telephone calls
- Training new employees
- Quality Control

Users - Typical

Stock brokers
Traders
Financial Institutions
Banks
Telemarketing Groups
ACD-Systems
Insurance Co.
Police & Fire Departments
Legal departments

Model:

Basic TDP-7400
Analog output for all lines
on all 740x Digital Sets, and
840x phones in 4-wire config.

* 75, 85, Definity, DCP™ of Lucent



Technical Specifications

TDP-7400 Board - 4 ports

Digital Input

Input tap - 15 feet max length

Interface - Transmit pair

- Receive pair

Output - Analog (2500 set)

- 2000' Length -nominal

- 600 Ohm

- Hi-Impedance Option

Power - Box Enclosure

Type - Wall Plug

Input - 120 Volts AC

Output - 9 VDC

Usage - 1 Amp DC max

Power - Rack Mounted

Type - Switching

Input - 120 Volts AC

Output - 5 VDC

Usage - 10 Amp DC max

Board Size: 7" x 9"

Rack Size: Standard 19" Telecom

Note: Can support 8400 Digital phone sets
when configured for 4 wire.



www.DynaMetric.com

717 S. Myrtle Ave, Monrovia, CA 91016

Phone 626-358-2559

800-525-6925

FAX 626-359-5701