




11636 GOLDRING RD • ARCADIA, CALIFORNIA 91006-5815
626-358-2559 • FAX 626-359-5701 • 800-525-6925

Instructions

*TLP-107SY Telephone Recorder Patch with Beeps and 15db Audio Gain P/N 44160-1 C Series

The TLP-107SY provides an analog audio connection to loggers from telephones that have modular connected handsets. The TLP-107SY provides a clear recording of both sides of your conversation from almost all telephones whether they are digital or analog. This unit provides 15db amplification of the audio signal to the recorder for those recorders that use VOX Control rather than Automatic Gain Control.

The TLP-107SY injects a short beep at approximately 15 second intervals onto the phone line. The beep is audible in the earphones of all phones connected to the conversation and is recorded. Beep volume is adjusted using a small screwdriver through the hole in the bottom of the unit, and may be stopped by turning the volume control to minimum. The unit is powered by a 6VDC AC adapter supplied with each unit.

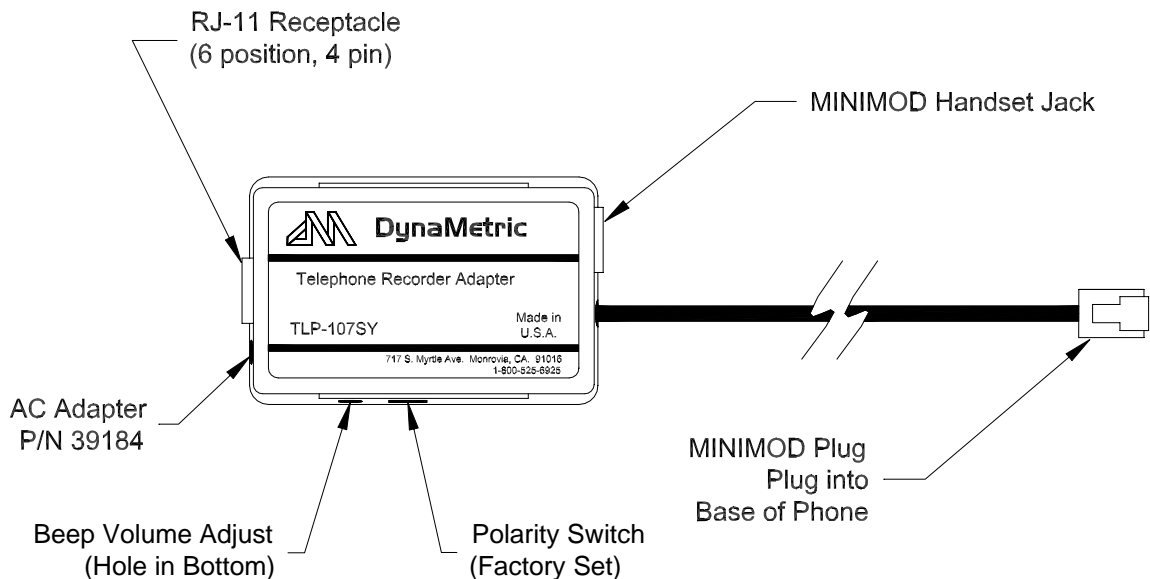

*Also for: TLP-107SYE

Instructions
TLP-107SY Telephone Recorder Patch with Beeps
and 15 db Audio Gain P/N 44160-1 C Series

To install the unit, unplug the handset coil cord from the base of the telephone and plug it into the handset jack on the TLP-107SY. Insert the cable from the TLP-107SY into the handset jack on the phone base. Connect a line cord from the logger into the RJ-11 jack on the TLP-107SY. The unit may be mounted at a convenient location on the base of the phone with the adhesive pad. Only the two central conductors of the RJ-11 jack in the unit are connected and carry the audio signal. Plug the 6VDC AC Adapter, furnished with the unit, into a nearby 120VAC power outlet. Insert the plug from the adapter into the jack on the TLP-107SY.

