




11636 GOLDRING RD • ARCADIA, CALIFORNIA 91006-5815
626-358-2559 • FAX 626-359-5701 • 800-525-6925

Instructions TLP-104SY Telephone Logger Patch P/N 44160-3 C Series

The TLP-104SY provides an analog audio connection to loggers from telephones that have modular connected handsets. The TLP-104SY will provide a clear recording of both sides of your conversation from almost all telephones whether they are analog or digital.

The TLP-104SY is similar to the TLP-104 except that the TLP-104SY has 15db of amplification of the audio output to the logger. A recording will be made whenever the handset is used. The unit is powered by a plug in AC adapter, which is included.

NOTE: Pins 3 & 4 of the RJ11 jack carry the analog audio to the logger and are the only two conductors connected.

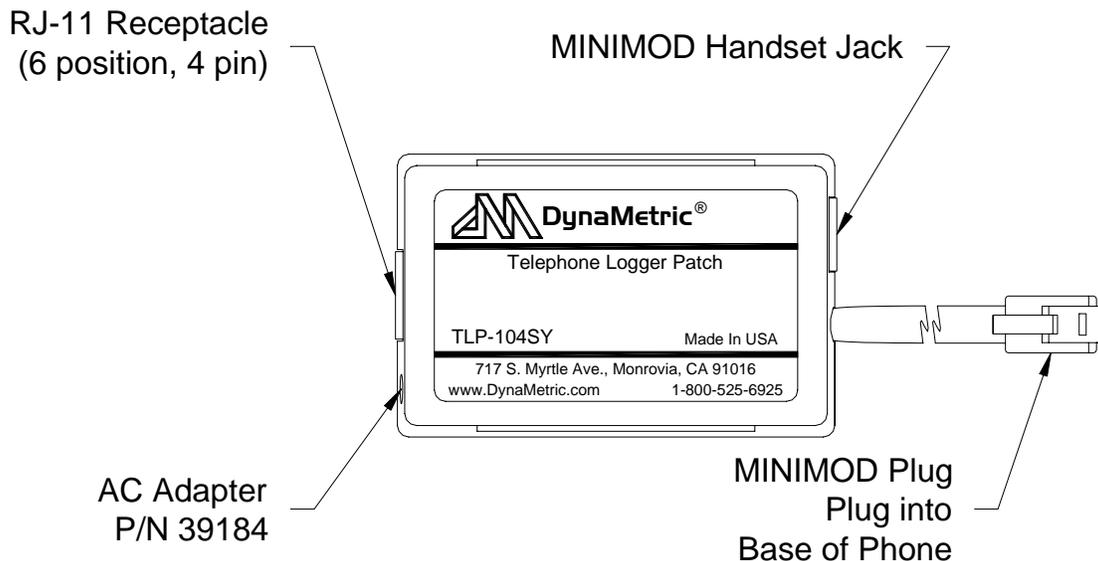

Instructions

TLP-104SY Telephone Logger Patch

P/N 44160-3 C Series

To install the unit, disconnect the handset coil cord from the base of the telephone and replace it with the MINIMOD plug from the TLP-104SY. Connect the handset coil cord into the MINIMOD jack on the TLP-104SY. Connect a line cord from the logger into the RJ11 jack on the TLP-104SY. Plug in the AC Adapter to a nearby 120 VAC outlet and into the power jack on the TLP-104SY. The unit may be mounted at a convenient location on the base of the phone utilizing the adhesive pad.

